

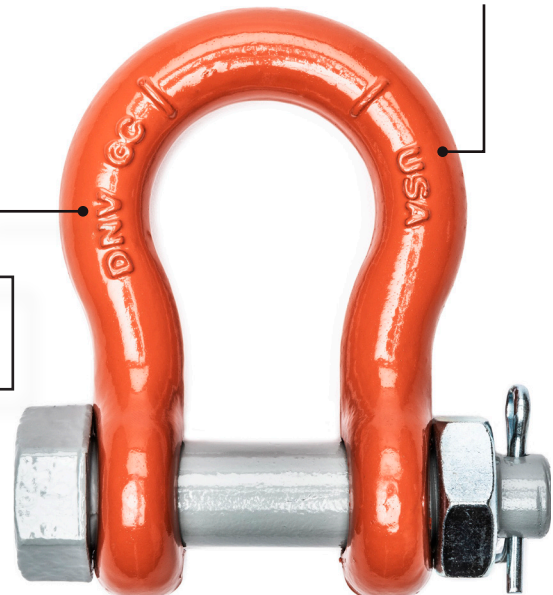


Campbell's portfolio of anchor shackles is now even more robust. Our new line of DNV Type Approved Bolt Type Anchor Shackles feature innovative design changes in our forging and heat treating process to comply with the growing offshore rigging industry.

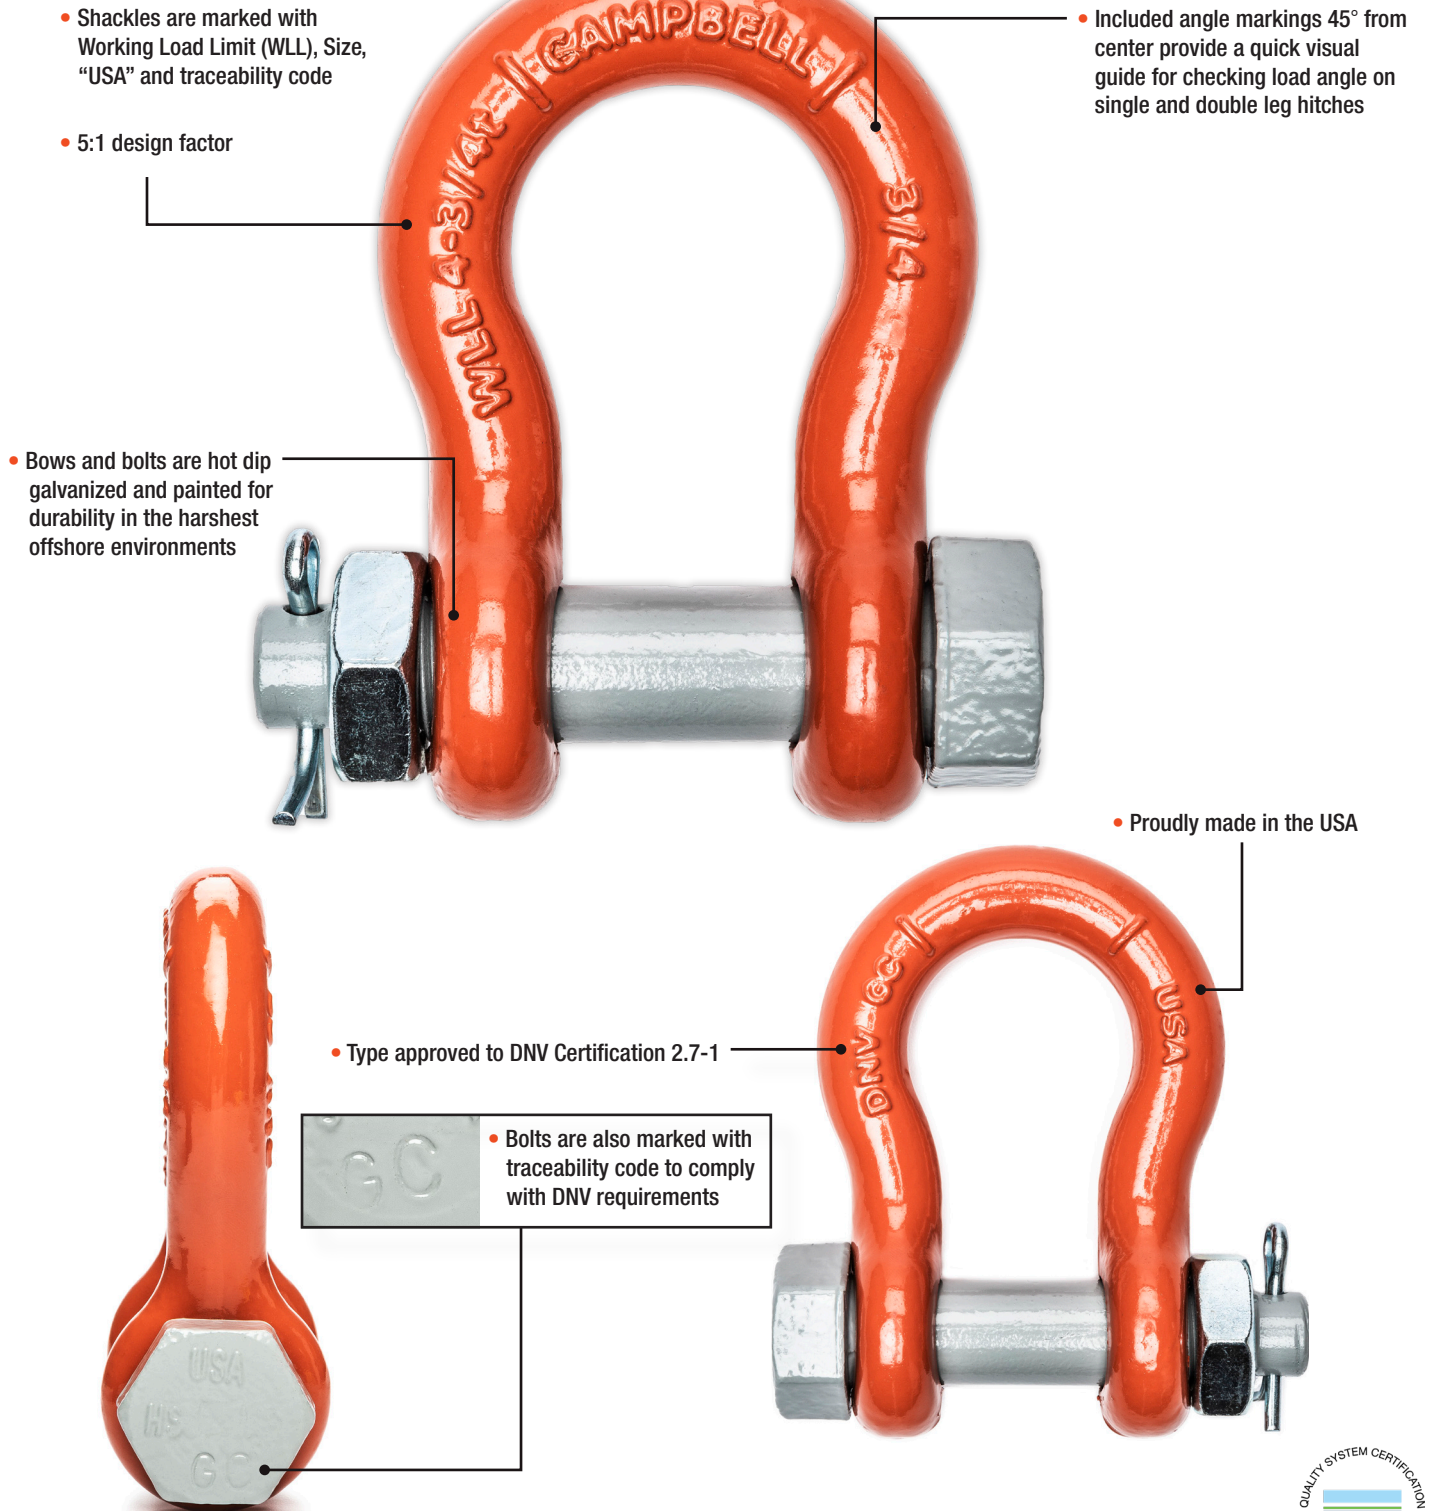

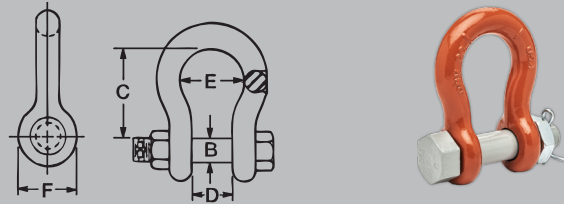

Trade Size	Cat. No.	UPC No.	Working Load Limit (Metric Tons)	B Dim.	C Dim.	D Dim.	E Dim	F Dim.
3/4 in	5391235DNV	020418329166	4-3/4 t	7/8 in	2-13/16 in	1-1/4 in	1-13/16 in	1-3/4 in
7/8 in	5391435DNV	020418329173	6-1/2 t	1 in	3-1/8 in	1-7/16 in	2-1/16 in	2 in
1 in	5391635DNV	020418329180	8-1/2 t	1-1/8 in	3-3/4 in	1-11/16 in	2-1/2 in	2-3/8 in
1-1/8 in	5391835DNV	020418329197	9-1/2 t	1-1/4 in	4-1/4 in	1-13/16 in	2-15/16 in	2-5/8 in
1-1/4 in	5392035DNV	020418329203	12 t	1-3/8 in	4-1/2 in	2 in	3-1/4 in	3 in
1-3/8 in	5392235DNV	020418329210	13-1/2 t	1-1/2 in	5-1/4 in	2-1/4 in	3-1/2 in	3-1/4 in
1-1/2 in	5392435DNV	020418329227	17 t	1-5/8 in	5-3/4 in	2-3/8 in	3-7/8 in	3-1/2 in

- Meets or exceeds strength requirements to ASME B30.26 and to EN 13889
- Galvanized finish to ASTM-A-153 and powder coated to provide extra protection in harsh environments
- Meets DNV-GL 2.7.1 Marking of Lifting Sets Section 8.6
- Made in the USA
- Meets or exceeds Charpy V impact strength of ASTM A952 42J at -20°C (31 ft-lb at -4°F)
- 3.1 Certification available through CustomerLink for DNV 2.7-1 and EN 13889
- 5:1 Design Factor
- DO NOT EXCEED THE WORKING LOAD LIMIT